


ALT R230 RESIN BEAD TYPICAL @ ALL
MEMBRANE TERMINATION POINTS.

ALT RS233 MORTAR W/ALT R268 TEXTURED
COATING TRAFFIC SURFACING.

ALT R230 MEMBRANE APPLIED CONTINUOUSLY
OVER DECK SUBSTRATE (TYP.)

(1) PLY ALT R230 THIXO MEMBRANE FLASHING
EXTEND HORIZONTAL 6" MINIMUM ON SLAB &
TIE-ON DRAIN BODY 1" MINIMUM AS SHOWN.

PREPARE, LEVEL & PATCH SUBSTRATE AS
REQUIRED W/ALT RS242 OR RS233 MORTAR
AFTER PRIMING & PRIOR TO APPLYING
ALT R230 MEMBRANE (TYP.)

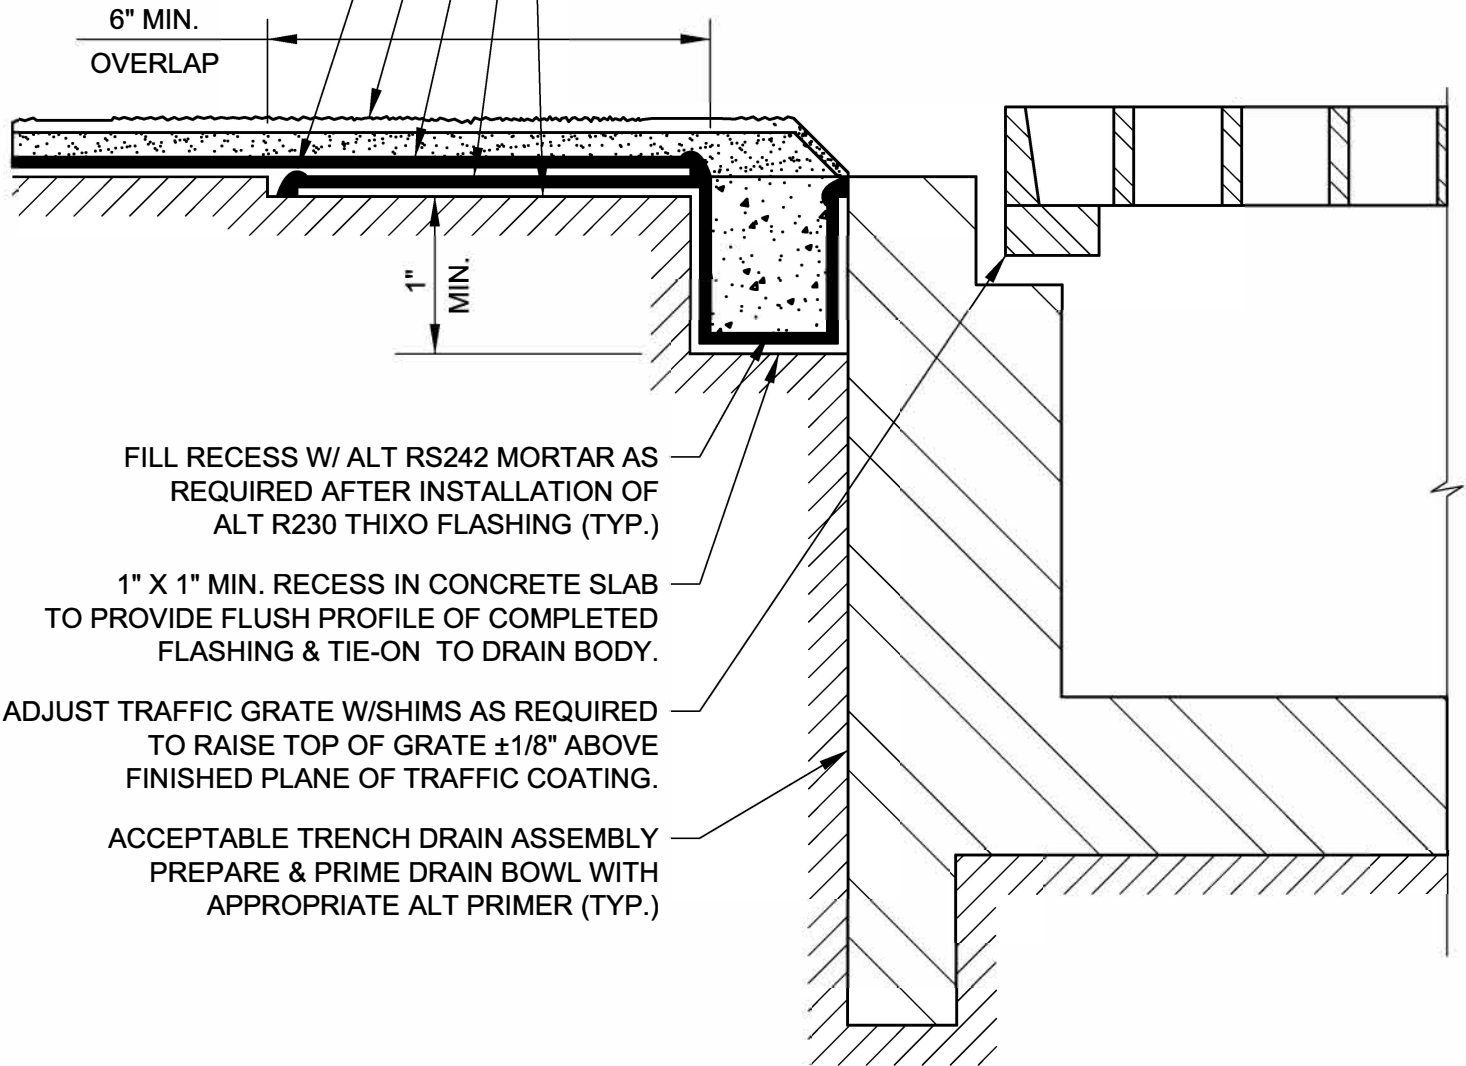

FILL RECESS W/ ALT RS242 MORTAR AS
REQUIRED AFTER INSTALLATION OF
ALT R230 THIXO FLASHING (TYP.)

1" X 1" MIN. RECESS IN CONCRETE SLAB
TO PROVIDE FLUSH PROFILE OF COMPLETED
FLASHING & TIE-ON TO DRAIN BODY.

ADJUST TRAFFIC GRATE W/SHIMS AS REQUIRED
TO RAISE TOP OF GRATE $\pm 1/8$ " ABOVE
FINISHED PLANE OF TRAFFIC COATING.

ACCEPTABLE TRENCH DRAIN ASSEMBLY
PREPARE & PRIME DRAIN BOWL WITH
APPROPRIATE ALT PRIMER (TYP.)



TRENCH DRAIN FLASHING

DRAWING NO.:

TR-D2

REVISION
0

ISSUE DATE
10-15-2014

SCALE
N.T.S.

DRAWN BY
ALT Global

TR-D02